



V1000 IP66

IP66

200 V Single-Phase  
0.1 kW to 3.0 kW

400 V Three-Phase  
0.2 kW to 18.5 kW

## Compact Vector Drive in IP66 protection class

Decentralized solution for variable speed and simple positioning applications without cabinet.

- ▶ No need for costly enclosures against dust, water, oil or other environmental stress. Adding additional components possible within the enclosure – no need for further cabinets.
- ▶ **2 Housing versions**
  - Built in oversize LED operator panel – For best readability and handling with gloves
  - Blank face plate, RJ45 connector for external operator connection
- ▶ Easy installation and wiring
- ▶ Integrated Class C1 EMC filter
- ▶ All features known from standard V1000
  - Control Modes: V/f, V/f with simple PG, Open Loop Vector for Induction and Permanent Magnet Motors
  - Screwless control terminals
  - Dual rating (Heavy/Normal duty) for operation of one size larger motor
  - Induction motor and PM motor control
  - Designed for 10 years of maintenance-free operation
  - DriveWorksEZ – integration of PLC functionality



### Applications



Water treatment



Paper mills



Ceramic market

Perfect for wet and dusty working environments that are cleaned with water streams or suitable chemicals.

YASKAWA Europe GmbH  
 Drives & Motion Division  
 Hauptstr. 185  
 65760 Eschborn  
 Germany  
 Tel: + 49 (0) 6196-569 300  
 Fax: + 49 (0) 6196-569 399  
 info@yaskawa.eu.com  
 www.yaskawa.eu.com



## Standard Specifications

CANopen

Modbus®

MECHATROLINK



Inputs

- ▶ 6 Multi-function Inputs, programmable NPN / PNP logic (sink / source)
- ▶ 2 Multi-function Analogue Inputs  
1x 0 ... 10 V, 1x 0 ... 10 V / 4 ... 20 mA  
Switch selectable
- ▶ 1 Pulse Train Input  
0.5 ... 32 kHz, 5 ... 24 V

MEMOBUS/Modbus, RS232, USB, RS422/RS485 up to 115.2 kBaud, Termination resist. (120 Ω) switchable

Outputs

- ▶ 1 Pulse Train Output  
0 ... 32 kHz
- ▶ 1 Analogue Output, programmable 0 ... +10V / 2mA, res. 1/1000
- ▶ 2 Photo-coupler Outputs, programmable Max. 48 VDC / 2 ... 50 mA
- ▶ 1 CO Relay Output, programmable 30 VDC, 250 VAC, 10 mA .... 1A

CC-Link

PROFINET

EtherCAT®

DeviceNet

EtherNet/IP

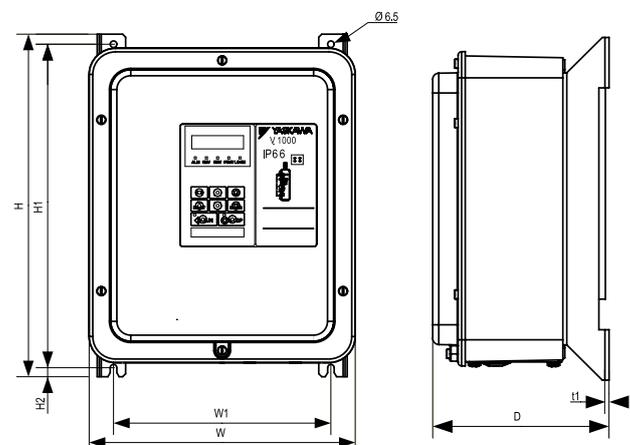


Fig. 1

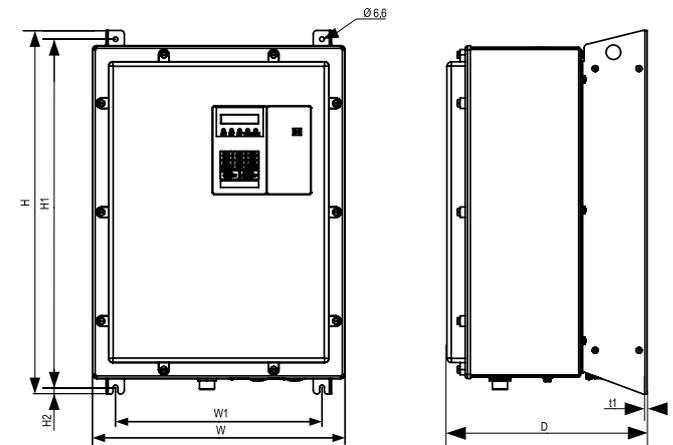


Fig. 2

Drive model	CIMR-VC□□□□□HAA - 0080 (LED operator) CIMR-VC□□□□□HAA - 0081 (Blank face)	Motor Output in kW at ND (HD)*	Figure	Dimensions in mm						
				W	H	D	W1	H1	H2	t1
BA0001 – BA0012		1.8 (0.1) to 3.0 (2.2)	Fig. 1	262	340	173.5	214	321	9	2
4A0001 – 4A0011		0.37 (0.18) to 5.5 (4.0)								
4A0018 – 4A0038		7.5 (5.5) to 18.5 (15.0)	Fig. 2	345	500.5	273.5	282	458.5	10	2

\*HD (Heavy Duty), ND (Normal Duty)

Specifications are subject to change without notice for ongoing product modifications and improvements. © YASKAWA Europe GmbH. All rights reserved.

Literature No. YEU\_INV\_Flyer\_V1000\_IP66\_EN\_v3\_1111  
 Printed in Germany, November 2011